

Features


- Dimension (L x W x H) : 185.0 x 150.0 x 84.0 (mm)
- N+1 Redundant
- Application for IPC, Storage, Embedded server, Networking



* Redundant Module : YM-6351DxR

Specifications

Total Output	350W
Input Voltage	90 - 264 VAC
Input Frequency	47 - 63 Hz
Efficiency	65% at Max load of 230VAC
Input Current	6.5A max at 115VAC, 3.0A max at 230VAC
Inrush Current	50A max at 115VAC, 100A max at 230VAC
Power Factor	> 0.98
Earth Leakage Current	3.5mA max at 264VAC / 50Hz
Hold Up Time	> 17 mS / 115VAC
Over Current Protection	+3.3V : 22.0A ~ 30.0A +5V : 27.5A ~ 37.5A +12V : 26.4A ~ 36.0A
Over Voltage Protection	+3.3V : 4.0V ~ 4.6V +5V : 5.7V ~ 6.8V +12V : 13.4V ~ 15.6V
MTBF	100 kHrs per Bellcore SR-332 Issue2 at 25°C ambient
Operating Temperature	0 to 40 °C
Operating Humidity	5 - 90%, Non-condensing
Storage Temperature	-40 °C to +70 °C

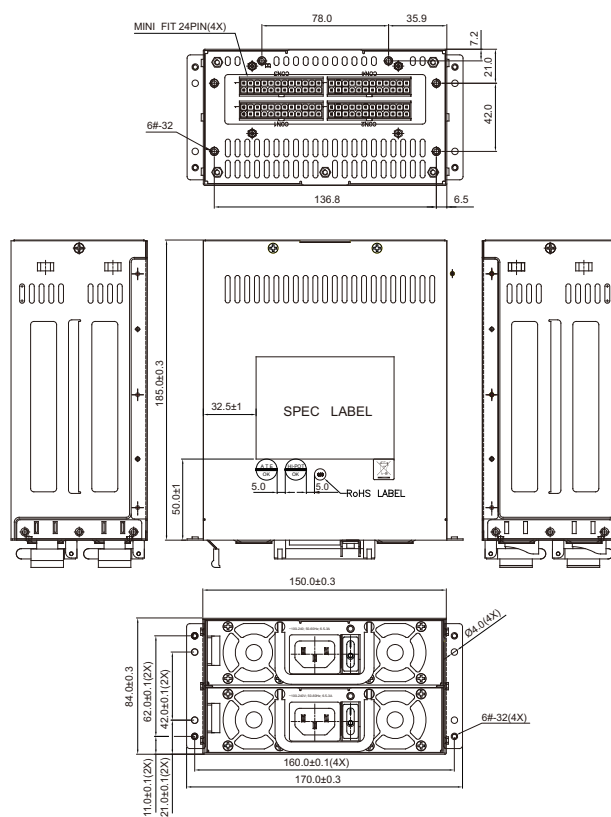

Output	Minimum Load	Maximum Load	Condition	Ripple & Noise
+3.3 V	0 A	20 A	+3.3 V & +5 V combined power ≤ 191 W	50mV p-p
+5 V	2.0 A	25 A		50mV p-p
+12 V	0.5 A	20 A		120mV p-p
-5 V	0 A	0.5 A		150mV p-p
+5 VSB	0 A	2.0 A		50mV p-p