




## Features

- Dimension (L x W x H) : 300.0 x 50.5 x 40.2 (mm)
- N+1 Redundant
- Support PMBus
- Application for IPC, Storage, Embedded server, Networking



## Specifications

Total Output	300W
Input Voltage	90 - 264 VAC
Input Frequency	47 - 63 Hz
Efficiency	80 Plus GOLD certified Highest efficiency 92% at 230VAC
Input Current	5.0A max at 115VAC, 2.5A max at 230VAC
Inrush Current	40A max at 264VAC
Power Factor	> 0.99
Earth Leakage Current	1.5mA max at 264VAC / 50Hz
Hold Up Time	> 20 mS / 115VAC
Over Current Protection	+12V : 30.0A ~ 40.0A
Over Voltage Protection	+12V : 14.0V ~ 16.0V
Short Circuit Protection	No damage, resistance $\leq 0.01\Omega$
MTBF	100 kHrs per Bellcore SR-332 Issue2 at 25°C ambient
Operating Temperature	0 to 50 °C
Operating Humidity	95% RH, Non-condensing
Storage Temperature	-40 °C to +70 °C

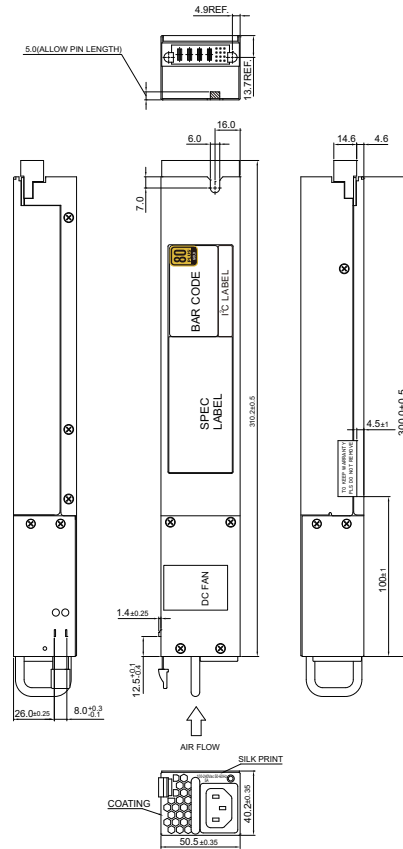

Output	Minimum Load	Maximum Load	Condition	Ripple & Noise
+12 V	0 A	25 A		120mV p-p
+5 VSB	0 A	3.0 A		50mV p-p