

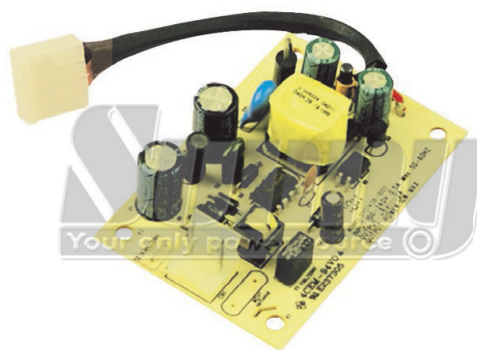


Country of Origin : China
 Operating Temperature : 0~40 [°C]
 Dimension : 75.5 x 50 x 23 [mm]
 Efficiency level (ErP) : 
 Approvals / Marks : 



Features:

Wide range Input (90 ~ 264) VAC / (47 ~ 63)Hz.
 Open Frame power supply, single output.
 Overload, over voltage & short protection.
 For I.T.E. use only + RoHS conform.

Specification:

	Model	Voltage DC [V]	Loading [A]	Line/Road regulation [%]	OCP [A]	OVP [V]	Max. Power [W]	Eff. [%]	Ripple & Noise [mV] p-p	AC or DC Cable output	
ErP V.	SYS1438-1005-OF	5	0~2	±5	3.0~5.0	11±4	10	≥73.37	100	(*)	
	SYS1438-1212-OF	12	0~1	±5	1.4~3.5	17±4	12	≥77.76	150	(*)	
OEM Production:	(*) depends on customer request										
OUTPUT	Turn on delay	5000 ms max @ AC low line input@output full load									
	Efficiency (Normal)	Above minimum average efficiency in active mode(Meet CEC V)									
	Transient response (dv, tmax)	0.3v dv Max At AC nominal input loading from 50% load to max load or peak load 8ms tmax Dynamic rise time 10uS max , duty 40mS max , Dynamic load step is slew rate of 0.5A/uS									
	Burn in test	Full load 2 Hours									
INPUT	Voltage	(90 ~ 264)VAC									
	Frequency	(47 ~ 63) Hz									
	Current	0.5A rms @ AC low line input and DC output full load									
	Inrush Surge Current (cold start)	40/60A max @ power supply cold start, ambient temperature 25°C @ 115Vac / 230Vac nominal AC input.									
	Leakage current	0.25 mA Max.									
	Power consumption	0.3W rms max. At AC nominal input@output min load									
	Hold up time	8ms At AC nominal input@ output full load (1 half cycle)									
PROTECTION	Over Current /Short protection	The power supply will self-protect any output to ground, And auto recovery when abnormal circuit faults remove. An output short circuit is defined as any output impedance of less than 0.1 ohms.									
	Over Voltage	The power supply will not be auto recovered when faults remove >>Voltage limit<<									
	Input protection	1A/250V The power supply shall be protected against power line surges and any abnormal condition.									
	No load protection	The power supply is provided with no load operation to prevent the power supply and system from damage.									
OTHERS	Dielectric Strength (Hi-pot)	Primary to Secondary: 3000VAC / 10mA / 60s									
	M.T.B.F	50K hours full rated load operation at 25 °C, according to the MIL-HDBK-217F.									
	Cable length	-									
	PLD (power line disturbance)	LINE POWER SURGE LINE VOLTAGE SAG – more information will be provide on request									
	Cooling method	By natural air									
	Temperature coefficient:	< ±0.5% / °C									
ENVIRONMENT	Temperature	Operating: (0 ~ 40)°C / Storage: (-20 ~ 85)°C									
	Humidity	Operating: 8% ~ 90% RH / Storage: 5% ~ 95% RH non condensing									
SAFETY		CE									
EMC	Meet EN55022 class B, Fcc part 15 Sub part B class B.										
PACKING	1pc	N.W.: 40g(±10g) / pc G.W.: - g / pc									
	BOX	-(L)*(W)*(H) [mm]						- pcs (in plastic bag)/ 1box			

Mechanical case specification:

